


Plastic Geonet Production Line

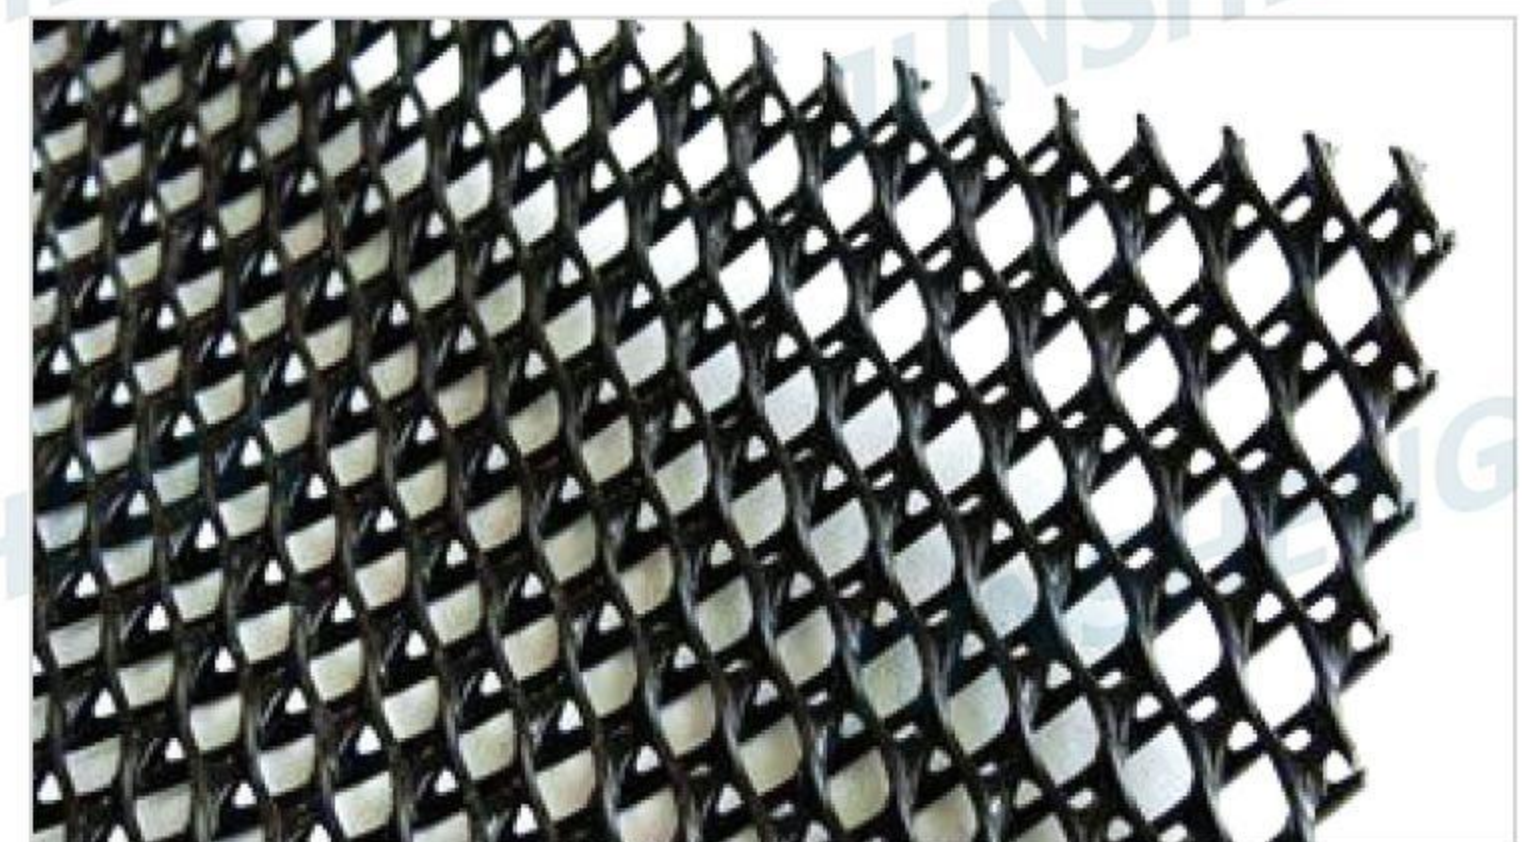

Brief Introduction

With leading technology, Junsheng geonet production line has advantages of distributing material uniformly and meets the production requirement of several kinds of HDPE or PP.

Geonet is mainly used in the field of architecture, irrigation, roadway, farming, sand prevention, and furniture, etc.

Main Technical Specification

Model		JS-TGW75	JS-TGW90	JS-TGW120	JS-TGW150
Screw dia.	mm	75	90	120	150
L/D ratio	L/D	28:1	28:1	28:1	28:1
Product width	mm	2000	2500	3000	4000
Output	Kg/h	70	80	100	130
Line speed	m/min	4-6	4-8	4-8	4-10
Installed capacity	KW	60	90	180	220
Power consumption	KW	40	55	110	130
Dimensions (L×W×H)	M	10×3×3.5	12×3×3.5	16×3.8×4	18×5×5
Total weight	T	7	8	9	11

Note: The above-mentioned data is only for your reference and we keep the rights for modification the component and machinery structure. The relevant contents involved in equipment purchase should be subject to the contract.