

HDPE Drainage Panel Production Line




Brief Introduction

HDPE Drainage Panel Production Line is Junsheng's innovative machinery in China (patent protected). Under unique mechanics design, Junsheng machine has following advantages:

- Convex wall thickness of the circular convex on the drainage panel is well-proportioned.
- Compression strength is 50% higher than similar product, which solves the problem.
- Power saving 30%.
- Higher output
- Same forming roller, with changing different dimples, different sizes will be got.
- With changing mould, round and square shape.
- Drainage board thickness range is 0.5-5.5mm, width up to 5000mm.
- Double color can be produced by another model machine.



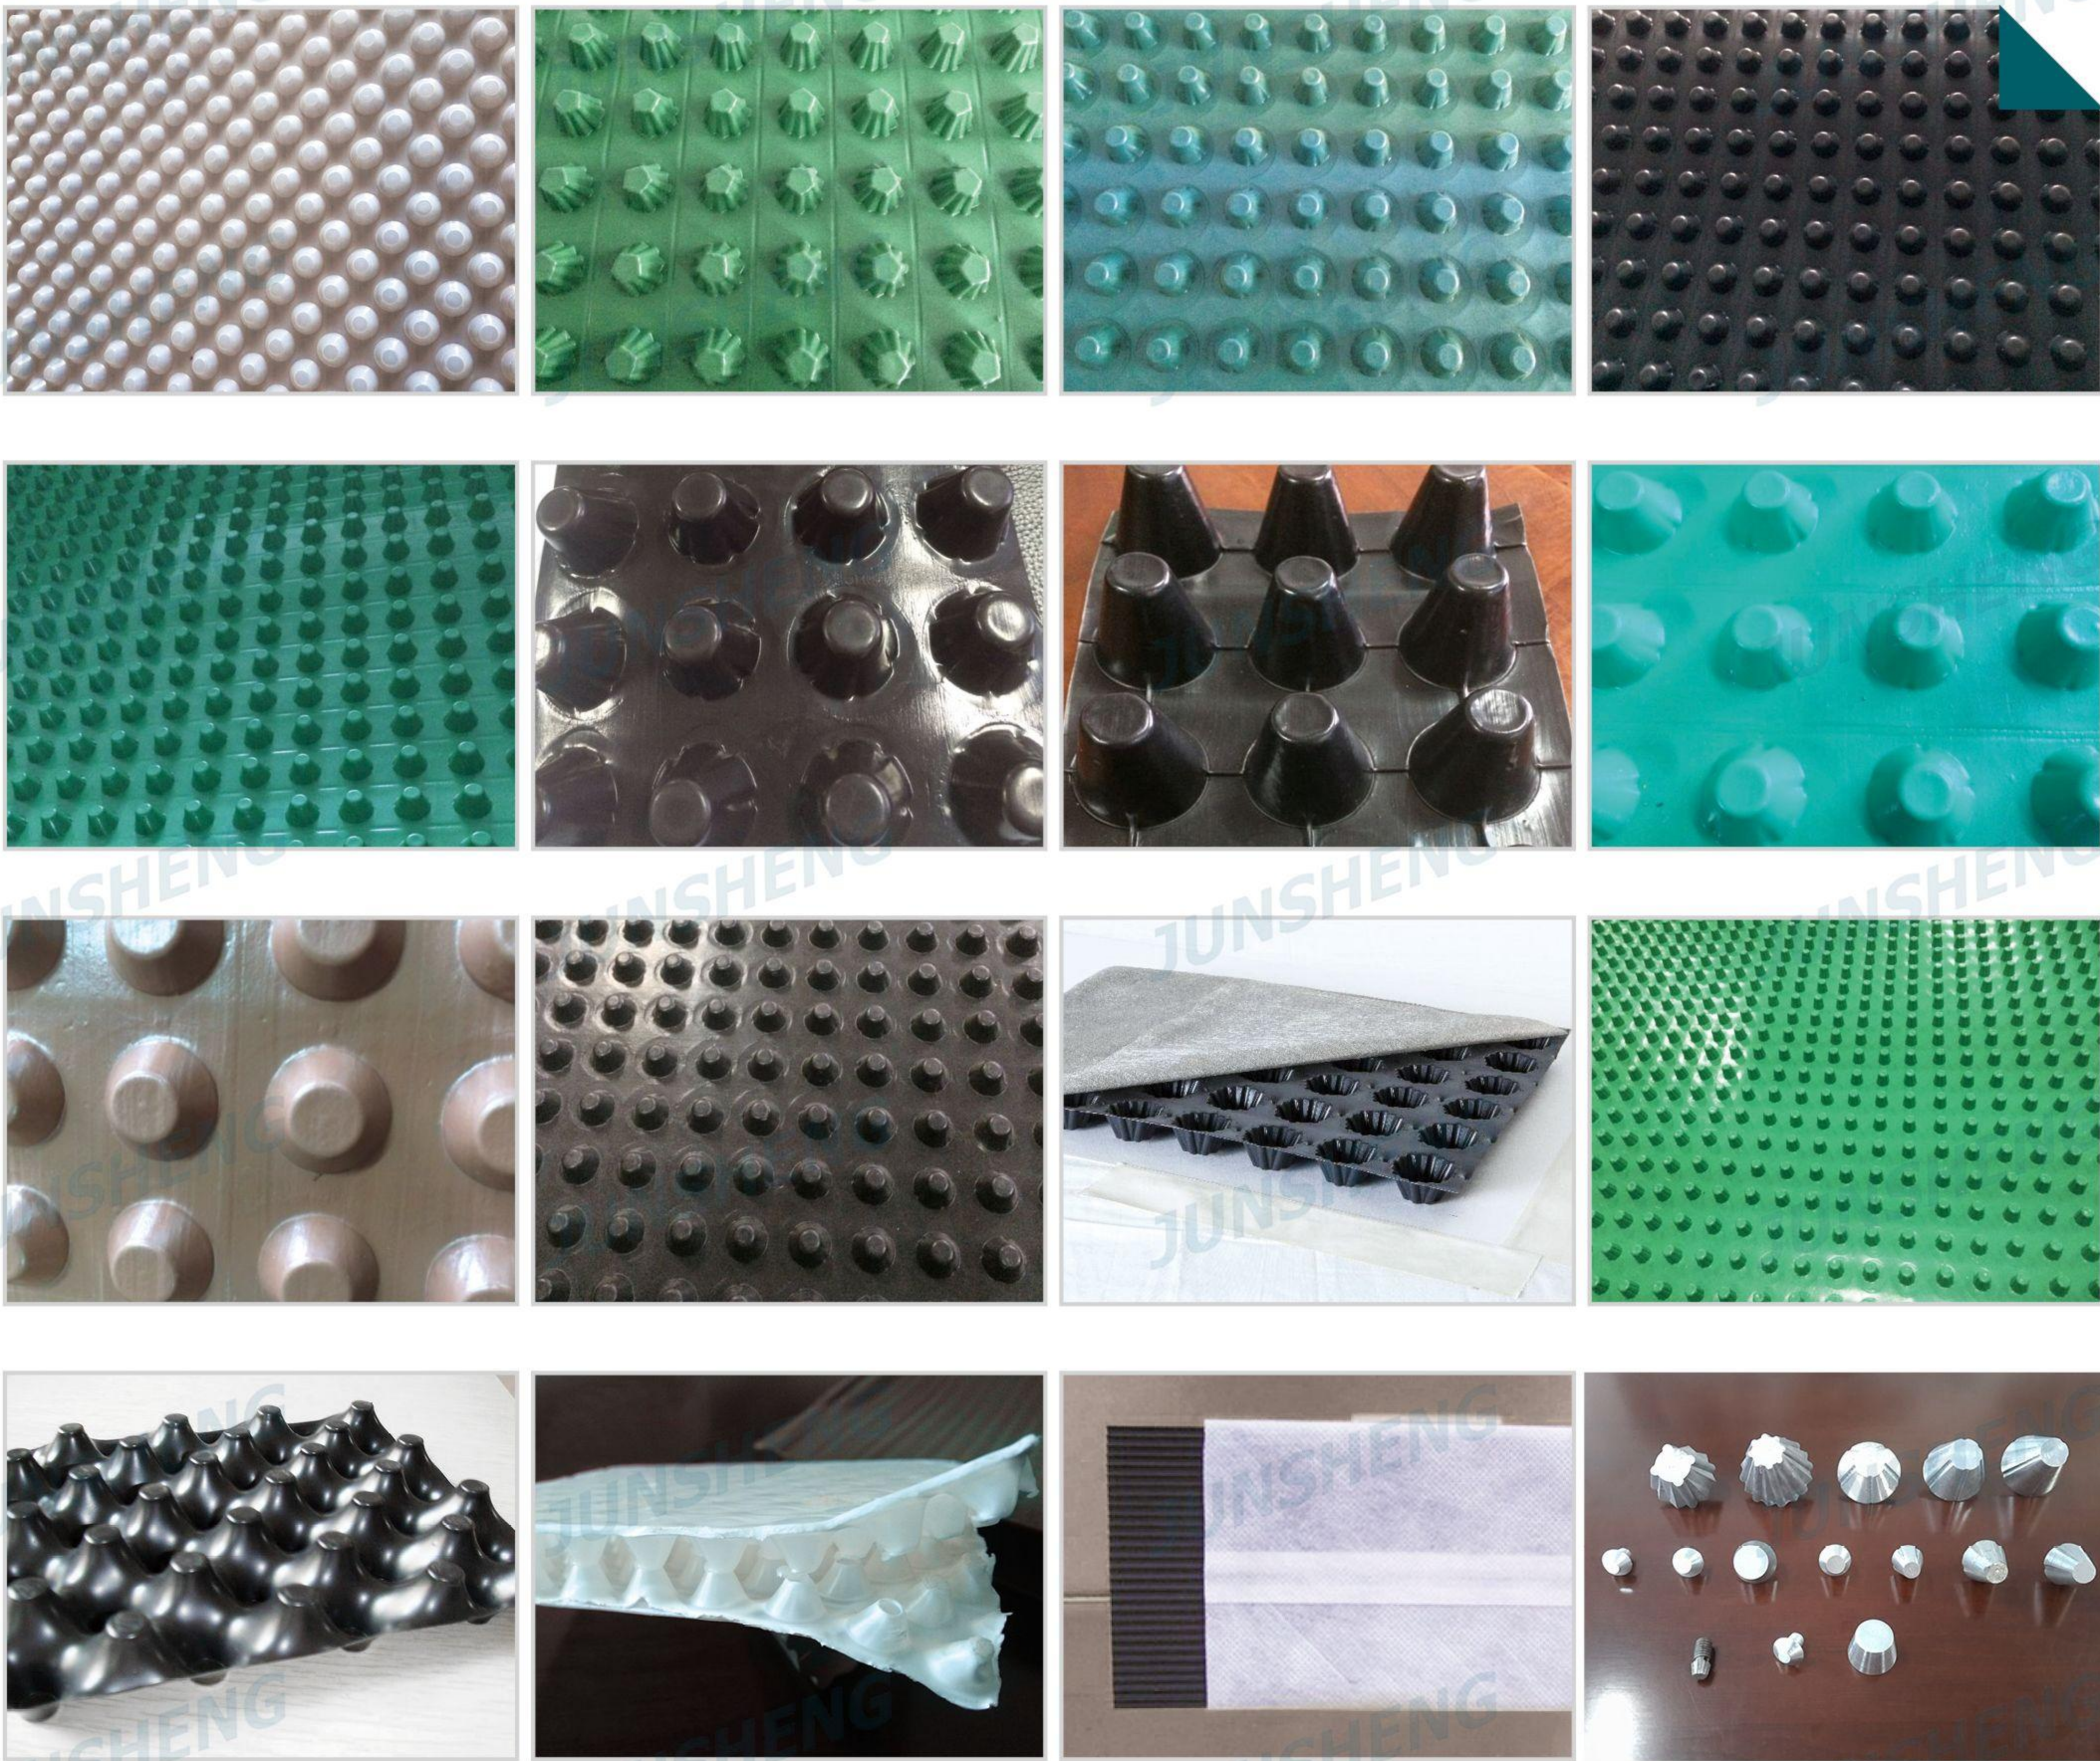

Main Technical Specification

Model		PSB-2000	PSB-3000	PSB-4000	PSB-5000	JS-PSB2000S
Screw dia.	mm	135	150	180	150×2	120×2
L/D ratio	L/D	30:1	30:1	30:1	30:1	30:1
Product width	mm	2000	3000	4000	5000	2000
Product height	mm	8, 10, 12, 15, 18, 20, 25, 30, 35, 40				
Output	Kg/h	400	500	700	1000	500
Line speed	m/min	2-6				
Installed capacity	KW	252	320	410	550	320
Power consumption	KW	132	160	220	300	160
Dimensions (L×W×H)	m	22×4×2.8	22×5×2.8	22×6×2.8	23×6×2.8	22×6×2.8
Total weight	T	16	20	28	35	21

Note:The above-mentioned data is only for your reference and we keep the rights for modification the component and machinery structure.The relevant contents involved in equipment purchase should be subject to the contract.